

# Zelio Time Timing Relays

Catalog  
January 2019



# Quick access to Product information

## Select your Catalog, your Training

### Digi-Cat

The complete digital catalog for industrial automation




Makes your choice easy every day, everywhere!



With just 3 clicks, you can reach the 7,000 pages of the Industrial Automation & Control catalog, in both English and French.

- Digi-Cat is available on a USB key (for PC). To get your Digi-Cat, please contact your local center
- Download Digi-Cat from this address:

<http://digi-cat.schneider-electric.com/download.html>


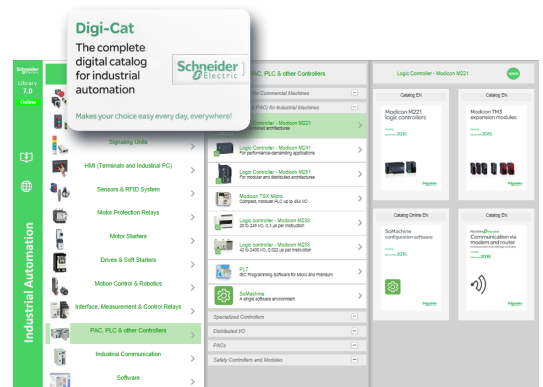


### Find your training

- Find the right training for your needs
- Locate the training center with the selector tool, using this address:

<http://www.schneider-electric.com/b2b/en/services/training/technical-training.jsp>

then click on

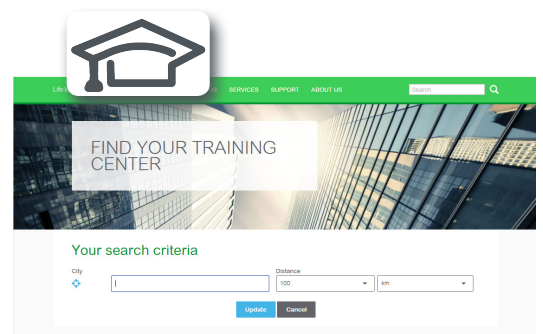

Life Is On



# General contents

## Zelio Time - Timing Relays

|   |         |
|---|---------|
| ■ <b>General Presentation</b> .....   | page 2  |
| □ Zelio RE22 Timing relays .....  | page 2  |
| □ Zelio NFC Timing relays.....  | page 3  |
| <b>Selection guide</b> .....  | page 4  |
| ■ <b>Presentation</b> .....   | page 6  |
| ■ <b>Definitions</b> .....  | page 7  |
| ■ <b>Selection table</b> .....  | page 8  |
| ■ <b>Functions</b> .....  | page 10 |
| ■ <b>References</b> .....   | page 23 |
| □ Modular relays with solid state or relay output,<br>width 17.5 mm/0.689 in. ....  | page 23 |
| □ Modular multifunction NFC Timing relay, relay output .....  | page 23 |
| □ Modular single, dual or multifunction relays with diagnostic<br>button and dial pointer, relay output, width 22.5 mm/0.886 in. .... | page 24 |
| □ Modular single, dual or multifunction relays,<br>relay output, width 22.5 mm/0.886 in. ....   | page 25 |
| □ Miniature plug-in relays, relay output .....  | page 26 |
| □ Analog, electronic relays, relay output, 48 x 48 mm .....   | page 27 |
| ■ <b>Product reference index</b> .....  | page 28 |

## Zelio Time - Timing Relays

Innovative, ergonomic and configurable offer with single or multifunction types

Zelio Time are timing relays designed to time events in industrial automation systems by closing and opening contacts before, during, or after a set time period. They are designed for hard-wired logic automated systems to complement the functions of industrial programmable logic controllers (PLCs).

They are suitable for a wide range of applications, including:

- Machines: single machine, and industrial automation and processes
- Buildings: lighting control, access control door locks, roller shutters
- Water segment: pumping and irrigation systems
- HVAC: fans and centralized water systems

Depending on the product model, these relays support multiple time ranges.

> Modular DIN rail mounted timing relays



RE17, RENF, RE22

> Miniature plug-in timing relays



REXL

> Panel mounted/plug-in timing relays



RE48A

The Zelio Time relays also feature:

- Wide power supply range from 24 to 240 V  $\bar{\sim}$
- Single or multi timing ranges from 0.02 s to 999 hrs
- Screw or spring connection terminals
- Relay or solid-state output
- Conformity to IEC 61812-1 and EN 61812-1 standards
- UL, CSA, GL, RCM, EAC, CCC, and China ROHS compliance
- Easy to set up with wiring diagrams on the side of the product

### Zelio RE22 Timing relays

#### Modular relays with unique features

- > Innovative: dial pointer LED indicator and diagnostic button to assist setup and troubleshooting
- > Compact and reliable
- > Energy efficient: simple to implement, operate, and maintain
- > Compliance with standards and certifications
- > QR code embedded in instruction sheet for easy setup



Dial pointer LED indicator

Diagnostic button

**Zelio Time → A complete range of reliable and flexible offers**

**Zelio NFC Timing Relay:** As simple as

- 1 Install
- 2 Open app
- 3 Set parameters

## Zelio NFC Timing Relays

The NFC timing relay is designed to time events in industrial automation systems by closing or opening contacts before, during, or after a set timing period.

The mobile app, Zelio NFC created for NFC timing relay is Android enabled and can be downloaded on the phone from Google Play.

### Simplify product selection


- > One product reference
- > 28 timing functions
- > 2 outputs
- > Wide range of voltage supplied (24...240 V  $\overline{\text{---}}$  /  $\sim$ )

### Achieve unprecedented accuracy

- > Reduce error margin from 10% to 0.2%
- > Timing can be set by hour, minute, second, or millisecond



Select Function

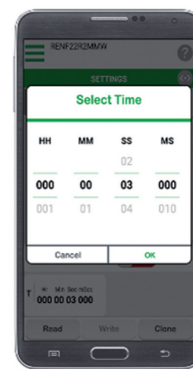

Select Time

### Diagnose your relay

- > Read relay status
- > Overwrite the output
- > Manage relays without power

### Count on superior security

- > Four-digit password protection



Diagnose



Security setting

### Save valuable time

- > Clone settings
- > Store settings
- > Share settings through SMS

**Zelio NFC Timing Relay → World's first industrial NFC timing relay**

|                     |   |   |
|---------------------|---|---|
| <b>Applications</b> | These timing relays enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.  |   |
| <b>Output</b>       | <b>Solid state</b><br>Timing relays with solid state output reduce the amount of wiring required (wired in series). The durability of these timing relays is independent of the number of operating cycles. | <b>Relay</b><br>Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits. |



|                         |   |  |
|-------------------------|---|--|
| <b>Type</b>             | Modular and DIN rail mounted  |  |
| <b>Time ranges</b>      | □ 7 ranges:<br>1 s,<br>10 s,<br>1 min,<br>10 min,<br>1 h,<br>10 h,<br>100 h | Depending on model:<br>□ 6 ranges<br>1 s,<br>10 s,<br>1 min,<br>10 min,<br>1 h,<br>10 h<br>□ 7 ranges:<br>1 s,<br>10 s,<br>1 min,<br>10 min,<br>1 h,<br>10 h,<br>100 h |
| <b>Timer Relay type</b> | <b>RE17L</b>  | <b>RE17R</b>   |
| <b>Pages</b>            | 23  | 23   |

|   |  |  |  |
|---|--|--|--|
| These timing relays enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.      |  |  |  |
| <b>Relay</b><br>Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits. |  |  |  |



|                              |  |  |   |
|------------------------------|--|--|---|
| Modular and DIN rail mounted |  | Miniature and plug-in  | Analogue and panel-mounted/plug-in  |
| 0.1 s to 999 h               | Depending on model:<br>□ 7 ranges:<br>1 s,<br>10 s,<br>1 min,<br>10 min,<br>1 h,<br>10 h,<br>100 h<br>□ 7 ranges:<br>1 s,<br>3 s,<br>10 s,<br>30 s,<br>100 s,<br>300 s,<br>10 min<br>□ 7 ranges<br>0.5 s<br>1 s<br>3 s<br>10 s<br>30 s<br>100 s<br>300 s<br>□ 1 range<br>30 s<br>□ 10 ranges:<br>1 s,<br>3 s,<br>10 s,<br>30 s,<br>100 s,<br>300 s,<br>30 min,<br>300 min,<br>30 h,<br>300 h | □ 7 ranges:<br>0.1 s...1 s,<br>1 s...10 s,<br>0.1 min...1 min,<br>1 min...10 min,<br>0.1 h...1 h,<br>1 h...10 h,<br>10 h...100 h | 14 ranges:<br>1.2 s,<br>3 s,<br>12 s,<br>30 s,<br>120 s,<br>300 s,<br>12 min,<br>30 min,<br>120 min,<br>300 min,<br>12 h,<br>30 h,<br>120 h,<br>300 h |
| <b>RENF</b>                  | <b>RE22</b>  | <b>REXL</b>  | <b>RE48A</b>  |
| 23                           | 24   | 26   | 27  |



## DIN rail mounted timing relays




RE17

RENF

RE22

## Miniature plug-in timing relays with sockets




REXL

RXZE2M114

## Panel-mounted/plug-in timing relays



RE48A

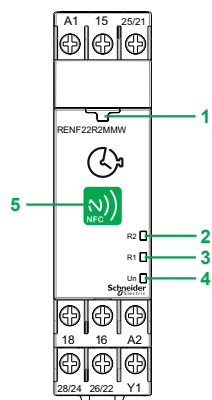

Zelio NFC Timing Relay



Zelio NFC timing relay with Smartphone mobile app

## Presentation

A timing relay is a component that is designed to time events in industrial automation systems by closing or opening contacts before, during, or after a set timing period. There are three main families of timing relays:

- DIN rail mounted Modular relays (**RE17**, **RENF**, and **RE22**) designed for mounting on DIN rails in an enclosure
- Miniature plug-in relays (**REXL**) designed to be plugged into sockets
- Panel mounted/plug-in relays (**RE48A**) designed for mounting on the front panel to give users easy access to the settings

These relays have 1, 2, or 4 outputs. For some references from RE22 and RE48 range, the second output can be either timed or instantaneous. If the power is switched off during the timing period, the relay reverts to its initial position.

The Zelio Time simple-to-use innovative NFC timing relay is enabled and controlled by the Near Field Communication technology available in present-day-smartphones.

Application examples:


- opening of automatic doors
- alarm
- lighting in toilets
- car park barriers, etc.

## Zelio NFC Timing Relay description

- 1 Pairing indication LED (Green)
- 2 Output 2 indication LED (Amber)
- 3 Output 1 indication LED (Amber)
- 4 Power supply indication LED (Green)
- 5 NFC antenna location

## Zelio NFC Timing Relay mobile application

To use NFC timing relay, an Android phone with NFC feature and Android firmware (version 4.1 and above) are required. The Zelio NFC app can be downloaded in the mobile with one of the following methods:

- Align the mobile phone NFC antenna to the product NFC antenna. This will take you to the Google Play page for downloading the app.
- Go to Google Play  and search for "Zelio NFC".
- Scan the below QR code to download the Zelio NFC app.



With Zelio NFC App installed in your mobile device, you can retrieve/configure and lock/unlock the product settings, and diagnose product status. All related timing function diagrams, wiring diagram and help contents can be obtained from the app.




**Note:** The default function for NFC Timer product is Function A (Power on-delay) and T=3s.

## Definitions

The following definitions explain relay operation:

### ■ Relay output:

This is the most common type of output. When the relay is energized, the moving armature is attracted by the coil and so actuates the contacts, which change state. When the relay is de-energized, both the armature and the contacts revert to their initial position. This type of output allows complete isolation between the power supply and the output. There are three types of output contact:

|  |  |
|--|--|
| <b>CO:</b> Changeover contact, i.e. when the relay is de-energized, the circuit between the common point C and NC is closed and when the relay is operating (coil energized), it closes the circuit between the common point C and the NO contact. |  |
| <b>NC:</b> A contact that is closed without being actuated is called a <b>Normally Closed (NC)</b> contact.  |  |
| <b>NO:</b> A contact that closes when actuated is called a <b>Normally Open (NO)</b> contact.  |  |

### ■ Solid state output:

This output is entirely electronic and involves no moving parts; service life is therefore increased.

### ■ Breaking capacity:

The current value that a contact is capable of breaking in specified conditions.

### ■ Mechanical durability:

The number of mechanical operating cycles of the contact or contacts.

### ■ Minimum switching capacity (or minimum breaking capacity):

This is the minimum required current that can flow through the contacts of a relay.

### ■ X1/X2/Y1/Gate control input:

Control input allows timing in progress to be interrupted without it being reset.

## Functions

Timing functions are identified by letters. For the complementary functions, select the main timing function using the selection dial in the front panel; refer to functional diagrams for connection.

| Main timing functions | Complementary functions (1) | Definitions  |
|-----------------------|-----------------------------|--|
| A (2)                 |                             | Power on-delay relay   |
|                       | <b>Ac</b>                   | On-delay and off-delay relay with control signal   |
|                       | <b>Act</b>                  | On-delay and off-delay relay with control signal and pause/summation control signal              |
|                       | <b>Ad</b>                   | Pulse delayed relay with control signal  |
|                       | <b>Ah</b>                   | Pulse delayed relay (single cycle) with control signal   |
|                       | <b>Ak</b>                   | Asymmetrical on-delay and off-delay relay with control signal                                    |
|                       | <b>Akt</b>                  | Asymmetrical on-delay and off-delay relay with control signal and pause/summation control signal |
|                       | <b>At</b>                   | Power on-delay relay with pause/summation control signal   |
| B (2)                 | <b>Aw</b>                   | Power on-delay relay with retrigger/restart control signal                                       |
|                       |                             | Single interval relay with control signal  |
| C (2)                 | <b>Bw</b>                   | Double interval relay with control signal  |
|                       |                             | Off-delay relay with control signal  |
| D (2)                 | <b>Ct</b>                   | Off-delay relay with control signal and pause/summation control signal                           |
|                       |                             | Symmetrical flashing relay (starting pulse-off)  |
| H (2)                 | <b>Di (2)</b>               | Symmetrical flashing relay (starting pulse-on)   |
|                       | <b>Dit</b>                  | Symmetrical flashing relay (starting pulse-on) with pause/summation control signal               |
|                       | <b>Diw</b>                  | Symmetrical flashing relay (starting pulse-on) with retrigger/restart control signal             |
|                       | <b>Dt</b>                   | Symmetrical flashing relay (starting pulse-off) with pause/summation control signal              |
|                       | <b>Dw</b>                   | Symmetrical flashing relay (starting pulse-off) with retrigger/restart control signal            |
|                       |                             | Interval relay   |
| K                     | <b>He</b>                   | Pulse-on de-energization   |
|                       | <b>Ht</b>                   | Interval relay with pause/summation control signal   |
|                       | <b>Hw</b>                   | Interval relay with retrigger/restart control signal   |
|                       |                             | Delay on de-energization (without auxiliary supply)  |
| L (2)                 |                             | Asymmetrical flashing relay (starting pulse-off)   |
|                       | <b>Li (2)</b>               | Asymmetrical flashing relay (starting pulse-on)  |
|                       | <b>Lit</b>                  | Asymmetrical flashing relay (starting pulse-on) with pause/summation control signal              |
|                       | <b>Lt</b>                   | Asymmetrical flashing relay (starting pulse-off) with pause/summation control signal             |

(1) Complementary functions enhance the main timing functions.

Example: **Ac**: timing after closing and opening of control contact.

(2) The most commonly used timing functions.



| Definitions (continued) |                             |   |
|-------------------------|-----------------------------|---|
| Main timing functions   | Complementary functions (1) | Definitions   |
| N                       |                             | Safe-guard relay  |
| O                       |                             | Delayed Safe-guard relay  |
| P                       |                             | Pulse delayed relay with fixed pulse length   |
|                         | Pt                          | Pulse delayed relay with fixed pulse length and pause/summation control signal        |
| Q                       |                             | Star-delta relay (2 NO outputs with same common)                                      |
|                         | Qc                          | Star-delta relay (1 CO output)  |
|                         | Qe                          | Star-delta relay (1 NC + 1 NO outputs with split common)                              |
|                         | Qg                          | Star-delta relay (2 CO outputs with same common)                                      |
|                         | Qgt                         | Star-delta relay (2 CO outputs with same common) with pause/summation control signal  |
|                         | Qt                          | Star-delta relay (2 CO outputs with split common)                                     |
|                         | Qtt                         | Star-delta relay (2 CO outputs with split common) with pause/summation control signal |
| T                       | TI                          | Bistable relay with control signal on   |
|                         | Tt                          | Retriggerable bistable relay with control signal on                                   |
| W                       |                             | Interval relay with control signal off  |
|                         | Wt                          | Interval relay with control signal off and pause/summation control signal             |

## Selection table

- Selection criteria**
- **Functions** (on-delay or off-delay, counter, flashing, etc.)
  - **Supply voltage** (example:  $\approx 12\text{ V} \dots 240\text{ V}$ )
  - **Timing range** for a timing relay (for example; 0.05 s... 100 h)
  - **Type of output** (contact or solid state) and required **Number of contacts**
  - **Rated current** or **Breaking capacity** of contacts, expressed in Amperes. This is the maximum current that may flow through the contacts.

| Functions                         | Timing range                    | Supply voltage   | Type of output       | Rated current         | Relay     |
|-----------------------------------|---------------------------------|--|----------------------|-----------------------|-----------|
| A                                 | 0.1 s...100 h                   | $\overline{\overline{\overline{}}}$ 12 V                               | 2 CO contacts        | 5 A                   | REXL2TMJD |
|                                   |                                 |  | 4 CO contacts        | 5 A                   | REXL4TMJD |
|                                   | 0.1 s...100 h                   | $\overline{\overline{\overline{}}}$ 24 V                               | 2 CO contacts        | 5 A                   | REXL2TMBD |
|                                   |                                 |  | 4 CO contacts        | 5 A                   | REXL4TMBD |
|                                   | 0.1 s...100 h                   | $\sim$ 24 V  | 2 CO contacts        | 5 A                   | REXL2TMB7 |
|                                   |                                 |  | 4 CO contacts        | 5 A                   | REXL4TMB7 |
|                                   | 0.1 s...100 h                   | $\sim$ 120 V   | 2 CO contacts        | 5 A                   | REXL2TMF7 |
|                                   |                                 |  | 4 CO contacts        | 5 A                   | REXL4TMF7 |
|                                   | 0.1 s...100 h                   | $\sim$ 230 V   | 2 CO contacts        | 5 A                   | REXL2TMP7 |
|                                   |                                 |  | 4 CO contacts        | 5 A                   | REXL4TMP7 |
| 0.1 s...100 h                     | $\approx 24 \dots 240\text{ V}$ | 1 solid state output   | 0.7 A                | RE17LAMW              |           |
|                                   |                                 | 2 CO contacts  | 5 A                  | RE48ATM12MW           |           |
| A, Ac, At, B, Bw, C, D, Di, H, Ht | 0.1 s...100 h                   | $\sim 24 \dots 240\text{ V}$   | 1 solid state output | 0.7 A                 | RE17LMBM  |
|                                   | 0.1 s...100 h                   | $\approx 12\text{ V}$  | 1 CO contact         | 8 A                   | RE17RMJU  |
|                                   | 0.1 s...100 h                   | $\approx 12 \dots 240\text{ V}$  | 1 CO contact         | 8 A                   | RE17RMMW  |
|                                   |                                 |  |                      | 8 A                   | RE17RMMWS |
|                                   | 0.1 s...100 h                   | $\overline{\overline{\overline{}}}$ 24 V, $\sim 24 \dots 240\text{ V}$ | 1 CO contact         | 8 A                   | RE17RMMU  |
|                                   | 0.1 s...100 h                   | $\overline{\overline{\overline{}}}$ 24/ $\sim 24 \dots 240\text{ V}$   | 2 CO contact         | 8 A                   | RE22R2MMU |
|                                   |                                 |  |                      | $\approx 12\text{ V}$ | RE22R2MJU |
|                                   | $\approx 12 \dots 240\text{ V}$ |  |                      | RE22R2MMW             |           |

(1) Complementary functions enhance the main timing functions.  
 Example: Ac: timing after closing and opening of control contact.

| Selection table (continued)   |                 |                              |                      |               |             |
|---|-----------------|------------------------------|----------------------|---------------|-------------|
| Functions   | Timing range    | Supply voltage               | Type of output       | Rated current | Relay       |
| A, At   | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE17RAMU    |
|   | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 2 CO contact         | 8 A           | RE22R2AMU   |
| A, Aw   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1AMR   |
|   |                 |                              | 2 CO contacts        | 8 A           | RE22R2AMR   |
| A, At, Aw   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1MAMR  |
| A, At, B, C, D, Di, H, Ht   | 0.1 s...10 h    | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE17RMEMU   |
| A, B, C, Di   | 0.02 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 5 A           | RE48AML12MW |
| A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Dit, H, Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, Ti, Tt, W | 0.1 s...999 h   | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RENF22R2MMW |
| A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, Qg, Qgt, Qt, Qtt, W, Wt                           | 0.05 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2MYMR  |
| A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt, Ac, Act                                    | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1MYMR  |
| A1, A2, H1, H2  | 0.02 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 5 A           | RE48AMH13MW |
| Ac  | 0.05 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2ACMR  |
| Ac, Act   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1ACMR  |
| Ad, Ah, N, O, P, Pt, Ti, Tt, W  | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE17RMXMU   |
|   | 0.1 s...100 h   | ≡ 24 V/~ 24...240 V          | 2 CO contacts        | 8 A           | RE22R2MXMU  |
| Ak, Akt   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1AKMR  |
| B   | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE17RBMU    |
| C   | 0.1 s...100 h   | ~ 24...240 V                 | 1 solid state output | 0.7 A         | RE17LCBM    |
|   | 0.1 s...100 h   | ≡ 24 V/~ 24...240 V          | 1 CO contact         | 8 A           | RE17RCMU    |
|   | 0.05 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2CMR   |
| C, Ct   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1CMR   |
| D, Dw   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1DMR   |
|   |                 |                              | 2 CO contacts        | 8 A           | RE22R2DMR   |
| H   | 0.1 s...100 h   | ~ 24...240 V                 | 1 solid state output | 0.7 A         | RE17LHBM    |
| H, Hw   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1HMR   |
|   |                 |                              | 2 CO contacts        | 8 A           | RE22R2HMR   |
| H, Ht   | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE17RHMU    |
| K   | 0.05 s...10 min | ≈ 24...240 V                 | 1 CO contact         | 5 A           | RE22R1KMR   |
|   |                 |                              | 2 CO contacts        | 5 A           | RE22R2KMR   |
| K, He   | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 5 A           | RE22R1MKMR  |
| L, Li   | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE17RLMU    |
|   | 0.1 s...100 h   | ~ 24...240 V                 | 1 solid state output | 0.7 A         | RE17LLBM    |
|   | 0.1 s...100 h   | ≈ 12 V                       | 1 CO contact         | 8 A           | RE17RLJU    |
|   | 0.02 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 5 A           | RE48ACV12MW |
| L, Lt, Li, Lit  | 0.05 s...300 h  | ≈ 24...240 V                 | 1 CO contact         | 8 A           | RE22R1MLMR  |
| Q   | 0.1 s...100 h   | ≡ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE22R1QMU   |
|   |                 | ~ 230...240 V, ~ 380...440 V | 1 CO contact         | 8 A           | RE22R1QMQ   |
| Qc  | 0.05 s...300 s  | ≈ 24 V, ~ 24...240 V         | 1 CO contact         | 8 A           | RE22R1QCMU  |
| Qe  | 0.3 s...30 s    | ~ 380...415 V                | 2 CO contacts        | 8 A           | RE22R2QEMT  |
|   |                 | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2QEM   |
| Qg  | 0.05 s to 300 h | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2QGMR  |
| Qt  | 0.05 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2QTMR  |
| W, Wt   | 0.05 s...300 h  | ≈ 24...240 V                 | 2 CO contacts        | 8 A           | RE22R2MWMR  |

## Functions

**U:** Supply  
**R:** Relay or solid state output  
**R1/R2:** 2 timed outputs  
**R2 inst.:** Second output is instantaneous if the correct position is selected  
**T:** Timing period

**X1/X2/Y1:** Control contacts  
**Ta:** Adjustable on-delay  
**Tr:** Adjustable off-delay

### Function diagram:


- Power-on
- Power-off
- Output closed/Control input on
- Output open/Control input off

### Function A: Power on-delay relay

#### 1 output



#### 2 outputs




The timing period T begins on power-on.

At the end of this timing period, the output(s) R close(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Ac: On-delay and off-delay relay with control signal

#### 1 output



#### 2 outputs



After power-on, and the closure of Y1 the timing period T starts.

At the end of this timing period, the output(s) R close(s).


When Y1 opens, the timing period T starts.

At the end of this timing period T, the output(s) R revert(s) to its/their initial position.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Act: On-delay and off-delay relay with control signal and pause/summation control signal

#### 1 output



After power-on and the closure of Y1 the timing period T starts and it can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

When Y1 opens, the timing T starts and it can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

$$T = t1 + t2 + \dots$$


$$T = t'1 + t'2 + \dots$$

### Function Ad: Pulse delayed relay with control signal

#### 1 output



#### 2 outputs



After power-on, pulsing or maintaining Y1 starts the timing T.

At the end of this timing period T, the output(s) R close(s).


The output(s) R will revert to its/their initial position the next time Y1 is pulsed or maintained.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## Functions (continued)

### Function Ah: Pulse delayed relay (single cycle) with control signal

1 output



2 outputs




After power-on, pulsing or maintaining control contact Y1 starts the timing T. A single cycle then starts with 2 timing periods T of equal duration (start with output(s) R in initial position).

The output(s) R closes (s) state at the end of the first timing period T and reverts to its/their initial position at the end of the second timing period T. Control contact Y1 should be reset in order to re-start the single flashing cycle.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Ak: Asymmetrical on-delay and off-delay relay with control signal

1 output



2 outputs



After power-on and the closure of control contact Y1, timing starts for a period Ta.


At the end of this timing period Ta, the output(s) R close(s).

A second timing period Tr starts when control contact Y1 re-opens. At the end of this timing period Tr, the output R reverts to its initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Akt: Asymmetrical on-delay and off-delay relay with control signal and pause/summation control signal

1 output



$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$


After power-on and the closure of Y1, timing starts for a period Ta and can be interrupted/paused each time X1 closes. When the cumulative total time elapsed reaches the preset value Ta, the output R closes.

A second timing period Tr starts when Y1 re-opens and can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value Tr, the output R open(s).

### Function At: Power on-delay relay with pause/summation control signal

1 output




$$T = t_1 + t_2 + \dots$$




$$T = t_1 + t_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$



$$T = t_1 + t_2 + \dots$$

After power-on, the timing period T starts. Timing can be interrupted/paused each time X1 closes.

**Note:** For RENF22R2MMW, RE17●, RE22R2AMU, RE22R2MMW, RE22R2MMU, and RE22R2MJU, timing can be interrupted/paused each time Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## Functions (continued)

### Function Aw: Power on-delay relay with retrigger/restart control signal

1 output



2 outputs




The timing period T starts on power-on. At the end of the timing period T, the output(s) R close(s).

Closing of the Y1 makes the output(s) R open. Opening of Y1 restarts timing period T. At the end of the timing period T, the output(s) R close(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function B: Single Interval relay with control signal

1 output



2 outputs




After power-on, pulsing or maintaining Y1 starts the timing T.

The output(s) R close(s) for the duration of the timing period T and then open(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Bw: Double interval relay with control signal

1 output



2 outputs




After power-on, transition of Y1 (either from open to closed or vice-versa) will cause the output(s) R to close(s) for the duration of the timing period T and then revert(s) to its/their initial state.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function C: Off-delay relay with control signal

1 output



2 outputs



After power-on and closure of the Y1, the output(s) R close(s).


When Y1 re-opens, timing T starts.

At the end of the timing period, output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


### Function Ct: Off-delay relay with control signal and pause/summation control signal

1 output



$$T = t_1 + t_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$

After power-on and the closure of Y1, the output(s) R close(s).

When Y1 re-opens, timing starts and can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



## Functions (continued)

### Function D: Symmetrical flashing relay (starting pulse-off)

1 output



2 outputs



After power-on, repetitive cycle starts with 2 timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.


This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


**Note:** Function D with Y1 is only for the RE17 range and RE22R2MJU, RE22R2MMU, and RE22R2MMW references.

### Function Di: Symmetrical flashing relay (starting pulse-on)

1 output



2 outputs




After power-on, repetitive cycle starts with 2 timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Dt: Symmetrical flashing relay (starting pulse-off) with pause/summation control signal


1 output



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) at its/their initial state for timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

The output(s) R will remain in the closed state for the same timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R revert(s) to its/their initial state.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


**Note:** For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.



## Functions (continued)

### Function Dit : Symmetrical flashing relay (starting pulse-on) with pause/summation control signal


#### 1 output



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

#### 2 outputs



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) when output(s) R close(s) for timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, then the output(s) revert(s) to its/their initial state.

The output(s) R will remain in this initial state for the same timing period T and the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s). This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


**Note:** For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.

### Function Dw: Symmetrical flashing relay (starting pulse-off) with retrigger/restart control signal

#### 1 output



#### 2 outputs




After power-on, output(s) R start(s) with open state for timing period T then close(s) for the same timing period T. This cycle is repeated indefinitely until the power supply is removed.

At any state of the output(s) R, when Y1 closes and then re-opens, the output(s) R open(s) and restart(s) the same operation as described at the beginning.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Diw: Symmetrical flashing relay (starting pulse-on) with retrigger/restart control signal

#### 1 output



#### 2 outputs



After power-on, output(s) R closes(s) for timing period T and open(s) for the same timing period T. This cycle is repeated indefinitely until the power supply is removed.

At any state of the output(s) R when Y1 closes and then re-opens, the output(s) R close(s) and restart(s) the same operation as described at the beginning.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## Functions (continued)

### Function H: Interval relay

1 output



2 outputs




After power-on, timing period T starts and the output(s) R close(s).

At the end of the timing period T, output(s) R revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function He: Pulse-on de-energization

1 output




After power-on > 80 ms followed by power-off, the output R closes for the duration of a timing period T and then open(s).

After power-on < 80 ms followed by power-off, the output R closes and opens before the end of the timing period T as it will not be able to sustain this state for the timing period T.


### Function Ht: Interval relay with pause/summation control signal

1 output



$$T = t_1 + t_2 + \dots$$

2 outputs




$$T = t_1 + t_2 + \dots$$

After power-on, output(s) R close(s) and timing period T starts, the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Note:** For RE17●, RE22R2MMW, RENF22R2MMW, RE22R2MMU, and RE22R2MJU, timing can be interrupted/paused each time Y1 closes.




$$T = t_1 + t_2 + \dots$$




$$T = t_1 + t_2 + \dots$$

### Function Hw: Interval relay with retrigger/restart control signal

1 output



2 outputs



After power-on, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R open(s).


At any state of the output(s) R when Y1 closes and then re-opens, the output(s) R close(s) and restart(s) the same operation as described at the beginning.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## Functions (continued)

### Function K: Delay on de-energization (without auxiliary supply)

#### 1 output



#### 2 outputs



After power-on, the output(s) R close(s).

After power-off, timing period T starts and, at the end of this period, the output(s) R open(s).


The power-on  $> T_k$  is necessary to sustain the timing period T.

There are 3 references with different  $T_k$  as follows:


- (a) RE22R1KMR  $\rightarrow T_k = 1\text{ s}$
- (b) RE22R2KMR  $\rightarrow T_k = 1\text{ s}$
- (c) RE22R1MKMR  $\rightarrow T_k = 80\text{ ms}$

### Function L: Asymmetrical flashing relay (starting pulse-off)

#### 1 output



#### 1 output




After power-on, repetitive cycle consisting of 2, independently adjustable timing periods  $T_a$  and  $T_r$  starts.

Each timing period corresponds to a different state of the output R.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


#### 2 outputs




**Note:** Function L with Y1 is only for the RE17 range.

### Function Li: Asymmetrical flashing relay (starting pulse-on)

#### 1 output



#### 1 output




After power-on, repetitive cycle consisting of 2, independently adjustable timing periods  $T_a$  and  $T_r$  starts.

Each timing period corresponds to a different state of the output R.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


#### 2 outputs



## Functions (continued)

### Function Lt: Asymmetrical flashing relay (starting pulse-off) with pause/summation control signal


1 output



$$T_r = t_1 + t_2 + \dots$$

$$T_a = t'_1 + t'_2 + \dots$$

2 outputs



$$T_r = t_1 + t_2 + \dots$$

$$T_a = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) at its/ their initial state for timing duration  $T_r$  and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value  $T_r$ , the output(s) R close(s).

The output(s) R will remain at its close state for timing duration  $T_a$ , and the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value  $T_a$ , then output(s) R reverts to its/their initial state.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Lit: Asymmetrical flashing relay (starting pulse-on) with pause/summation control signal


1 output



$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$

2 outputs



$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$

After power-on, output(s) R close(s) for timing duration  $T_a$  and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value  $T_a$ , the output(s) R open(s).

The output(s) R will remain open for timing duration  $T_r$ , the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value  $T_r$ , then output(s) R close(s).

This cycle is repeated indefinitely until the power supply is removed.


**Note:** For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.

### Function N: Safe-guard relay

1 output



2 outputs



After power-on and at the beginning of the control pulse Y1, the output(s) R close(s).

If the interval between two Y1 control pulses is greater than the set timing period T, timing elapses normally and the output(s) R open(s) at the end of the timing period T.


If the interval is less than the set timing period, the output(s) R remain(s) closed until this condition is met.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## Functions (continued)

### Function O: Delayed Safe-guard relay

1 output



2 outputs



An initial timing period T begins on power-on. At the end of this timing period, the output(s) R close(s).


At the beginning of the control pulse Y1, the output(s) R opens(s) and remain(s) in that state if the interval between two control pulses is less than the value of the set timing period T.

Otherwise, the output(s) R close(s) at the end of the timing period T.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


### Function P: Pulse delayed relay with fixed pulse length

1 output



P = 500 ms

2 outputs




The timing period T starts on power-on.

At the end of this period, the output(s) R close(s) for a fixed time P and then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


### Function Pt: Pulse delayed relay with fixed pulse length and pause/summation control signal

1 output



$T = t_1 + t_2 + \dots$   
P = 500 ms

2 outputs




After power-on, timing period T starts (it can be interrupted by operating control contact Y1).

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s) for a fixed time P then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function Q: Star-delta relay (2 NO outputs with same common)

2 outputs



t = 20, 40, 60, 80, 100, 120, 140 ms selectable

After power-on, the output R1 closes such that it closes the star contactor and the main contactor and the timing T starts (star connection timing period starts).


At the end of the timing period T, the output R1 opens such that it opens the star contactor and starts transition time t.

At the end of the transition time, the output R2 closes such that it closes the delta contactor.

## Functions (continued)

### Function Qc: Star-delta relay (1 CO output)

#### 1 output



t = 50 ms


After power-on, the output R initializes at its initial state to close the star contactor and main contactor and the timing T starts (star connection timing period starts).

At the end of the timing period T, output R closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R reverts to its initial state such that it closes the delta contactor.

### Function Qe: Star-delta relay (1 NC + 1 NO outputs with split common)

#### 2 outputs




After power-on, the output R1 is at its initial state such that it closes the star contactor and the main contactor and the timing T starts (star connection timing period starts).

At the end of the timing period T, output R1 opens such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

### Function Qg: Star-delta relay (2 CO outputs with same common)

#### 2 outputs



t = 50 ms (RE22R2MYMR)

t = 20, 40, 60, 80, 100, 120, 140 ms selectable (RE22R2QGMR)


After power-on, output R1 closes the star contactor and the main contactor, and the timing T starts (star connection time period starts).

At the end of the timing period T, output R1 reverts to its initial state such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

### Function Qt: Star-delta relay (2 CO outputs with split common)

#### 2 outputs



t = 50 ms (RE22R2MYMR)

t = 20, 40, 60, 80, 100, 120, 140 ms selectable (RE22R2QTMR)

t = 20, 30, ...ms (RENF22R2MMW)

After power-on, the outputs R1 and R2 initialize at its/their initial state such that they close the star contactor and the main contactor and the timing T starts (Star connection time duration starts).

At the end of the timing period T, the output R1 closes such that it opens the star contactor and starts transition time t.


At the end of the transition time, the output R2 closes such that it closes the delta contactor.



## Functions (continued)

### Function Qgt : Star-delta relay (2 CO outputs with same common) with pause/summation control signal

2 outputs



$T = t1 + t2 + \dots$   
 $t = 50 \text{ ms}$

After power-on, output R1 closes the star contactor and the main contactor, and the timing T starts (star connection time period starts).


During star connection time, the timing can be interrupted/paused each time X1/ Y1 closes.

When the cumulative total time elapsed reaches the preset value T, output R1 reverts to its initial state such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

### Function Qtt : Star-delta relay (2 CO outputs with split common) with pause/summation control signal

2 outputs



$T = t1 + t2 + \dots$   
 $t = 50 \text{ ms}$   
 $t = 20, 30, \dots \text{ms (RENF22R2MMW)}$

After power-on, the outputs R1 and R2 initialize at its/their initial state such that they close the star contactor and the main contactor and the timing T starts (star connection timing period starts).

During star connection time, the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, output R1 closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.


**Note:** For RNF22R2MMW, timing can be interrupted/paused each time Y1 closes.

### Function TI: Bistable relay with control signal on

1 output



2 outputs



After power-on and closure of Y1, the output(s) R close(s). The subsequent closure of Y1 causes the output(s) R to revert(s) to its/their initial state.


This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## Functions (continued)

### Function Tt: Retriggerable bistable relay with control signal on

1 output



2 outputs



After power-on and closure of Y1, the output(s) R close(s) and the timing T starts.


If the interval between 2 consecutive closures of Y1 is greater than the preset value T, the output(s) R will toggle from its/their present state at the end of the timing period.

If the interval between 2 consecutive closures of Y1 is less than the preset value T, the output(s) R toggle from its/their present state as soon as Y1 closes without completing duration T.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function W: Interval relay with control signal off

1 output



2 outputs




After power-on and closure of contact Y1, followed by opening of the control contact Y1, the output(s) R close(s) for a timing period T.

At the end of this timing period the output(s) revert to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


### Function Wt: Interval relay with control signal off and pause/summation control signal

1 output



$$T = t1 + t2 + \dots$$

2 outputs




After power-on and at the end of control pulse Y1, the output(s) R close(s) for a timing period T. Timing can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


## RE48ATM12MW

### Function A: Power on-delay relay




## RE48ACV12MW

### Function L: Asymmetrical flashing relay (starting pulse-off)

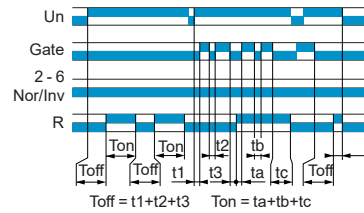


### Function Li: Asymmetrical flashing relay (starting pulse-on)

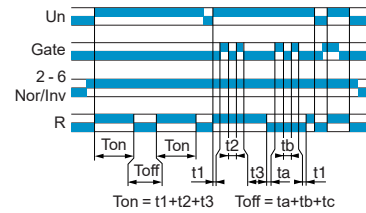


## RE48AML12MW


### Function A: Power on-delay relay

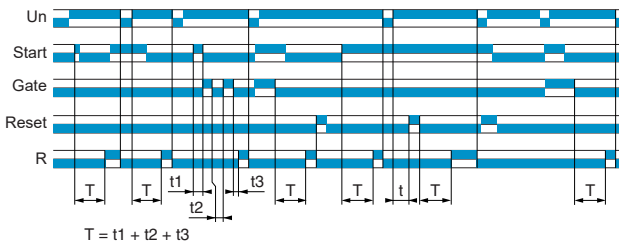


### Function B: Interval relay with control signal

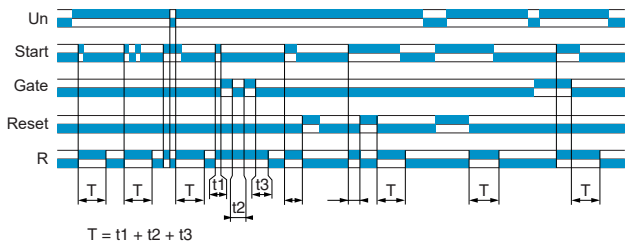

### Function C: Off-delay relay with control signal

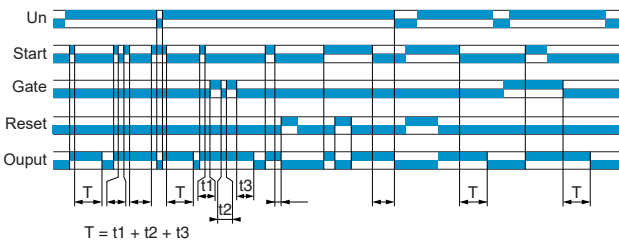


### Function Di: Symmetrical flashing relay (starting pulse-on)

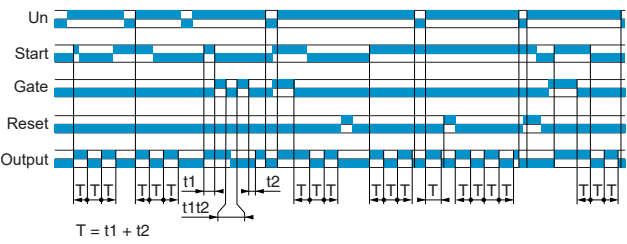


## RE48AMH13MW

### Functions A1, A2: Delay on energization



### Functions H1, H2: Pulse-on energization



**Note:** If A1 or H1 is selected, only R2 is timed, R1 is instantaneous.

## Zelio Time - Timing Relays

Modular relays with solid state or relay output, width 17.5 mm/0.689 in.

### Solid state output

- Multifunction, dual function, or single function
- Multi-range (7 selectable ranges)
- Multivoltage
- Solid state output: 0.7 A
- Screw terminals



RE17LAMW



RE17LLBM

### Relay output, 1 CO contact

- Dual function or single function
- Multi-range (7 selectable ranges)
- Multivoltage
- 1 relay output: 8 A
- Screw and spring terminals
- State indication by 1 LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RE17RAMU



RE17RMMWS

### 2 C/O contacts

- Multifunction
- Multiple timing ranges
- Multivoltage
- 2 relay outputs: 8 A - 250 V
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RENF22R2MMW

### Modular relays with solid state output 0.7 A

#### Single function

| Timing ranges  | Functions | Voltages V | Reference | Weight kg/lb    |
|--|-----------|------------|-----------|-----------------|
| 7 selectable timing ranges<br>1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | A         | ~ 24...240 | RE17LAMW  | 0.060/<br>0.132 |
|  | H         | ~ 24...240 | RE17LHBM  | 0.060/<br>0.132 |
|  | C         | ~ 24...240 | RE17LCBM  | 0.060/<br>0.132 |

#### Dual function

|  |       |            |          |                 |
|--|-------|------------|----------|-----------------|
| 7 selectable timing ranges<br>1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | L, Li | ~ 24...240 | RE17LLBM | 0.060/<br>0.132 |
|--|-------|------------|----------|-----------------|

#### Multifunction

|  |                                   |            |          |                 |
|--|-----------------------------------|------------|----------|-----------------|
| 7 selectable timing ranges<br>1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | A, At, B, C, H, Ht, D, Di, Ac, Bw | ~ 24...240 | RE17LMBM | 0.060/<br>0.132 |
|--|-----------------------------------|------------|----------|-----------------|

### Modular relays with relay output, 1 CO contact

#### Single function

| Timing ranges                              | Functions | Voltages V      | Reference | Weight kg/lb    |
|--|-----------|-----------------|-----------|-----------------|
| 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | B         | ~ 24/~ 24...240 | RE17RBMU  | 0.070/<br>0.154 |
|  | C         | ~ 24/~ 24...240 | RE17RCMU  | 0.070/<br>0.154 |

#### Dual function

|  |       |                 |          |                 |
|--|-------|-----------------|----------|-----------------|
| 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | A, At | ~ 24/~ 24...240 | RE17RAMU | 0.070/<br>0.154 |
|  | H, Ht | ~ 24/~ 24...240 | RE17RHMU | 0.070/<br>0.154 |
|  | L, Li | ~ 24/~ 24...240 | RE17RLMU | 0.070/<br>0.154 |
|  |       | ~ 12            | RE17RLJU | 0.070/<br>0.154 |

#### Multifunction

|  |                                   |                 |               |                 |
|--|-----------------------------------|-----------------|---------------|-----------------|
| 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | A, At, B, C, H, Ht, D, Di, Ac, Bw | ~ 12            | RE17RMJU      | 0.070/<br>0.154 |
|  |                                   | ~ 24/~ 24...240 | RE17RMMU      | 0.070/<br>0.154 |
|  |                                   | ~ 12...240      | RE17RMMW      | 0.070/<br>0.154 |
|  |                                   |                 | RE17RMMWS (1) | 0.070/<br>0.154 |
|  | Ad, Ah, N, O, P, Pt, Ti, Tt, W    | ~ 24/~ 24...240 | RE17RMXMU     | 0.070/<br>0.154 |
| 1 s, 10 s, 1 min, 10 min, 1 h, 10 h        | A, At, B, C, H, Ht, D, Di         | ~ 24/~ 24...240 | RE17RMEMU     | 0.070/<br>0.154 |

### NFC Timing relays with relay output

#### Multifunction

| Timing ranges  | Functions  | No. of relay outputs | Voltages   | Reference   | Weight            |
|----------------|--|----------------------|------------|-------------|-------------------|
|                |  |                      | V          |             | kg/lb             |
| 0.1 s to 999 h | A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Di, H, Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, Ti, Tt, W | 2                    | ~ 24...240 | RENF22R2MMW | 0.0904/<br>0.1993 |

(1) Connection by spring terminals.

# Zelio Time - Timing Relays

Modular single, dual, or multifunction relays with diagnostic button and dial pointer, relay output, width 22.5 mm/0.886 in.

**Output 1 CO and 2 CO contacts**

- Multifunction, dual function, or single function
- Multiple timing ranges (up to 10 switchable ranges)
- Multivoltage
- 1 or 2 relay outputs
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option
- Diagnostic button (1) and dial pointer LED indicator



RE22R2QTMR



RE22R2KMR



RE22R2QEMR



RE22R2HMR



RE22R1MYMR

**References**

**Single function**

| Timing ranges   | Functions                      | No. of relay outputs | Voltages        | Reference            | Weight          |
|---|--------------------------------|----------------------|-----------------|----------------------|-----------------|
|   |                                |                      | V               |                      |                 |
| 10 selectable timing ranges<br>1 s, 3 s, 10 s, 30 s,<br>100 s, 300 s, 30 min,<br>300 min, 30 h, 300 h | Ac                             | 2                    | ≈ 24...240      | RE22R2ACMR           | 0.105/<br>0.231 |
|   | Qg                             | 2                    | ≈ 24...240      | RE22R2QGMR           | 0.105/<br>0.231 |
|   | Qt                             | 2                    | ≈ 24...240      | RE22R2QTMR           | 0.105/<br>0.231 |
| 7 selectable timing ranges<br>1 s, 3 s, 10 s, 30 s,<br>100 s, 300 s, 10 min                           | K                              | 1                    | ≈ 24...240      | RE22R1KMR<br>(1) (2) | 0.100/<br>0.220 |
|   |                                | 2                    | ≈ 24...240      | RE22R2KMR<br>(1) (2) | 0.100/<br>0.220 |
| 7 selectable timing ranges<br>0.5 s, 1 s, 3 s, 10 s,<br>30 s, 100 s, 300 s                            | Qc                             | 1                    | ≈ 24/≈ 24...240 | RE22R1QCMU           | 0.080/<br>0.176 |
|   | Single range selection<br>30 s | Qe                   | 2               | ≈ 24...240           | RE22R2QEMR      |
|   |                                | 2                    | ≈ 380...415     | RE22R2QEMT           | 0.090/<br>0.198 |

**Dual function**

|  |   |   |            |                       |                 |
|--|---|---|------------|-----------------------|-----------------|
| 10 selectable timing ranges<br>1 s, 3 s, 10 s, 30 s,<br>100 s, 300 s,<br>30 min, 300 min,<br>30 h, 300 h | A, Aw   | 1 | ≈ 24...240 | RE22R1AMR             | 0.100/<br>0.220 |
|  |   | 2 | ≈ 24...240 | RE22R2AMR             | 0.105/<br>0.231 |
|  | C, Ct   | 1 | ≈ 24...240 | RE22R1CMR             | 0.100/<br>0.220 |
|  | C   | 2 | ≈ 24...240 | RE22R2CMR             | 0.105/<br>0.231 |
|  | Ac, Act   | 1 | ≈ 24...240 | RE22R1ACMR            | 0.100/<br>0.220 |
|  | Ak, Akt   | 1 | ≈ 24...240 | RE22R1AKMR            | 0.100/<br>0.220 |
| 7 selectable timing ranges<br>0.5 s, 1 s, 3 s, 10 s,<br>30 s, 100 s, 300 s                               | D, Dw   | 1 | ≈ 24...240 | RE22R1DMR             | 0.100/<br>0.220 |
|  |   | 2 | ≈ 24...240 | RE22R2DMR             | 0.105/<br>0.231 |
|  | H, Hw   | 1 | ≈ 24...240 | RE22R1HMR             | 0.100/<br>0.220 |
|  |   | 2 | ≈ 24...240 | RE22R2HMR             | 0.105/<br>0.231 |
| 10 selectable timing ranges<br>1 s, 3 s, 10 s,<br>30 s, 100 s, 300 s,<br>30 min, 300 min,<br>30 h, 300 h | Wt, W   | 2 | ≈ 24...240 | RE22R2MWMR            | 0.105/<br>0.231 |
|  | K, He   | 1 | ≈ 24...240 | RE22R1MKMR<br>(1) (2) | 0.100/<br>0.220 |
|  | A, At, Aw   | 1 | ≈ 24...240 | RE22R1MAMR            | 0.100/<br>0.220 |
|  | A, At, Aw,<br>Ac, Act, C,<br>Ct, D, Dt,<br>Dw, Di, Dit,<br>Diw, H, Ht,<br>Hw, W, Wt,            | 1 | ≈ 24...240 | RE22R1MYMR            | 0.100/<br>0.220 |
|  | A, At, Aw,<br>C, Ct, D, Dt,<br>Dw, Di, Dit,<br>Diw, H, Ht,<br>Hw, Qg,<br>Qgt, Qt,<br>Qtt, W, Wt | 2 | ≈ 24...240 | RE22R2MYMR            | 0.105/<br>0.231 |
|  | L, Li, Lt, Lit  | 1 | ≈ 24...240 | RE22R1MLMR            | 0.100/<br>0.220 |

(1) The diagnostic button is not available for the K function related references (RE22R1KMR, RE22R2KMR, and RE22R1MKMR).

(2) 1 or 2 relay outputs: 5 A - 250 V

# Zelio Time - Timing Relays

Modular single, dual, or multifunction relays, relay output, width 22.5 mm/0.886 in.

**Output 1 CO and 2 CO contacts**

- Multifunction, dual function, or single function
- Multiple timing ranges (7 switchable ranges)
- Multivoltage
- 1 or 2 relay outputs: 8 A - 250 V
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RE22R1QMU



RE22R2AMU



RE22R2MXMU

**References**

**Multifunction**

| Timing ranges  | Functions | No. of relay outputs | Voltages        | Reference  | Weight          |
|--|-----------|----------------------|-----------------|------------|-----------------|
|  |           |                      | V               |            | kg/lb           |
| 7 selectable timing ranges<br>1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | Q         | 1                    | ⇄ 24/∼ 24...240 | RE22R1QMU  | 0.090/<br>0.198 |
|  |           |                      | ∼ 230/380       | RE22R1QM Q | 0.090/<br>0.198 |

**Dual function**

|  |       |   |                 |           |                 |
|--|-------|---|-----------------|-----------|-----------------|
| 7 selectable timing ranges<br>1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | A, At | 2 | ⇄ 24/∼ 24...240 | RE22R2AMU | 0.090/<br>0.198 |
|--|-------|---|-----------------|-----------|-----------------|

**Multifunction**

|  |                                   |   |                 |            |                 |
|--|-----------------------------------|---|-----------------|------------|-----------------|
| 7 selectable timing ranges<br>1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h | A, At, B, C, H, Ht, Di, D, Ac, Bw | 2 | ⇄ 24/∼ 24...240 | RE22R2MMU  | 0.090/<br>0.198 |
|  |                                   |   | ∼ 12            | RE22R2MJU  | 0.090/<br>0.198 |
|  |                                   |   | ∼ 12...240      | RE22R2MMW  | 0.090/<br>0.198 |
| Ad, Ah, N, O, P, Pt, Tl, Tt, W   |                                   | 2 | ⇄ 24/∼ 24...240 | RE22R2MXMU | 0.090/<br>0.198 |



**Output, 2 CO and 4 CO contacts**

- Miniature and plug-in (21 x 27 mm/0.827 x 1.062 in.)
- Single function: function A = delay on energization
- Rated current ~ 5 A
- 7 timing ranges (0.1 s to 100 h)
- Multivoltage
- Excellent immunity to interference
- Power on and relay energized indication by 2 LEDs



REXL2TM●●



REXL4TM●●



RXZE2M114

**References**

**Single function**

| Timing ranges  | Functions            | No. of relay outputs | Voltages        |                | Reference | Weight          |                 |
|--|----------------------|----------------------|-----------------|----------------|-----------|-----------------|-----------------|
|  |                      |                      |                 | V              |           |                 |                 |
| 7 switchable ranges<br>0.1 s...1 s<br>1 s...10 s<br>0.1 min...1 min<br>1 min...10 min<br>0.1 h...1 h<br>1 h...10 h<br>10 h...100 h | A                    | 2                    | ⎓               | 12             | REXL2TMJD | 0.050/<br>0.110 |                 |
|  |                      |                      | ⎓               | 24             | REXL2TMBD | 0.050/<br>0.110 |                 |
|  |                      |                      | ~               | 24 (50/60 Hz)  | REXL2TMB7 | 0.050/<br>0.110 |                 |
|  |                      |                      | ~               | 120 (50/60 Hz) | REXL2TMF7 | 0.050/<br>0.110 |                 |
|  |                      |                      | ~               | 230 (50/60 Hz) | REXL2TMP7 | 0.050/<br>0.110 |                 |
|  |                      |                      | 4               | ⎓              | 12        | REXL4TMJD       | 0.050/<br>0.110 |
|  |                      |                      | ⎓               | 24<br>(1)      | REXL4TMBD | 0.050/<br>0.110 |                 |
| ~  | 24 (50/60 Hz)<br>(1) | REXL4TMB7            | 0.050/<br>0.110 |                |           |                 |                 |
| ~  | 120 (50/60 Hz)       | REXL4TMF7            | 0.050/<br>0.110 |                |           |                 |                 |
| ~  | 230 (50/60 Hz)       | REXL4TMP7            | 0.050/<br>0.110 |                |           |                 |                 |

**Sockets for relays**

| Contact terminal arrangement | For use with relays     | Connection   | Unit reference (2) | Weight kg/lb    |
|------------------------------|-------------------------|--------------|--------------------|-----------------|
| Mixed (3)                    | REXL2TM●●,<br>REXL4TM●● | Screw clamp  | RXZE2M114<br>(5)   | 0.048/<br>0.106 |
|                              | REXL2TM●●,<br>REXL4TM●● | Connector    | RXZE2M114M<br>(6)  | 0.056/<br>0.123 |
| Separate (4)                 | REXL2TM●●               | Connector    | RXZE2S108M         | 0.070/<br>0.154 |
|                              | REXL4TM●●               | Connector    | RXZE2S114M         | 0.058/<br>0.128 |
|                              | REXL2TM●●,<br>REXL4TM●● | Spring clamp | RXZE2S114S         | 0.070/<br>0.154 |

(1) For ⎓ 48 V supply, additional resistor 560 Ω 2 W/⎓ 24 V.

For ~ 48 V, additional resistor 390 Ω 4 W/~ 24 V.

(2) These products are sold in lots of 10.

(3) The inputs are mixed with the relay's power supply terminals, with the outputs being located on the opposite side of the socket.

(4) The inputs and outputs are separated from the relay power supply.

(5) Thermal current I<sub>th</sub>: 10 A.

(6) Thermal current I<sub>th</sub>: 12 A.

## Zelio Time - Timing Relays


Analog, electronic relays,  
relay output, 48 x 48 mm

### Output 2 CO contacts

- Time unit selector knob
- Multifunction, single function, or dual function
- Multirange
- Multivoltage
- 2 relay outputs, 5 A
- Panel-mounted or plug-in
- LED indication



RE48ATM12MW



RE48AMH13MW



RUCZ3M




RE48ASOC11AR



RE48ASOC8SOLD



RE48ASOC11SOLD



RE48ASETCOV



RE48AIPCOV

### References

#### 8-pin relay

| Timing ranges  | Function       | No. of relay outputs       | Voltages   | Reference   | Weight          |
|--|----------------|----------------------------|------------|-------------|-----------------|
|  |                |                            | V          |             | kg/lb           |
| 1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h | A              | 1                          | ≈ 24...240 | RE48ATM12MW | 0.140/<br>0.309 |
|  | A1, A2, H1, H2 | 2 of which 1 instantaneous | ≈ 24...240 | RE48AMH13MW | 0.140/<br>0.309 |

#### 11-pin relay

|  |             |   |            |             |                 |
|--|-------------|---|------------|-------------|-----------------|
| 1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h | L, Li       | 2 | ≈ 24...240 | RE48ACV12MW | 0.140/<br>0.309 |
|  | A, B, C, Di | 2 | ≈ 24...240 | RE48AML12MW | 0.140/<br>0.309 |

#### Sockets

| Description  | Number of pins | For use with relays      | Sold in lots of | Unit reference | Weight          |
|--|----------------|--------------------------|-----------------|----------------|-----------------|
|  |                |                          |                 |                | kg/lb           |
| IP 20 sockets with connection by connector and mixed contact terminals (1) | 8              | RE48ATM12MW, RE48AMH13MW | 10              | RUCZ2M         | 0.054/<br>0.119 |
|  | 11             | RE48ACV12MW, RE48AML12MW | 10              | RUCZ3M         | 0.054/<br>0.119 |
| IP 20 socket with screw terminal connections on rear face                  | 11             | RE48ACV12MW, RE48AML12MW | 1               | RE48ASOC11AR   | –               |

#### Connectors and protective cover

|                          |    |  |   |                |   |
|--------------------------|----|--|---|----------------|---|
| IP 20 solder connectors  | 8  | RE48ATM12MW, RE48AMH13MW                           | 1 | RE48ASOC8SOLD  | – |
|                          | 11 | RE48ACV12MW, RE48AML12MW                           | 1 | RE48ASOC11SOLD | – |
| Setting protection cover | –  | RE48ATM12MW, RE48ACV12MW, RE48AML12MW, RE48AMH13MW | 1 | RE48ASETCOV    | – |
| Protective cover IP 64   | –  | RE48ATM12MW, RE48ACV12MW, RE48AML12MW, RE48AMH13MW | 1 | RE48AIPCOV     | – |

(1) The inputs are mixed with the relay's power supply terminals, with the outputs being located on the opposite side of the socket.

| R              |    |
|----------------|----|
| RE17LAMW       | 23 |
| RE17LCBM       | 23 |
| RE17LHBM       | 23 |
| RE17LLBM       | 23 |
| RE17LMBM       | 23 |
| RE17RAMU       | 23 |
| RE17RBMU       | 23 |
| RE17RCMU       | 23 |
| RE17RHMU       | 23 |
| RE17RLJU       | 23 |
| RE17RLMU       | 23 |
| RE17RMEMU      | 23 |
| RE17RMJU       | 23 |
| RE17RMMU       | 23 |
| RE17RMMW       | 23 |
| RE17RMMWS      | 23 |
| RE17RMXMU      | 23 |
| RE22R1ACMR     | 24 |
| RE22R1AKMR     | 24 |
| RE22R1AMR      | 24 |
| RE22R1CMR      | 24 |
| RE22R1DMR      | 24 |
| RE22R1HMR      | 24 |
| RE22R1KMR      | 24 |
| RE22R1MAMR     | 24 |
| RE22R1MKMR     | 24 |
| RE22R1MLMR     | 24 |
| RE22R1MYMR     | 24 |
| RE22R1QCMU     | 24 |
| RE22R1QMQ      | 25 |
| RE22R1QMU      | 25 |
| RE22R2ACMR     | 24 |
| RE22R2AMR      | 24 |
| RE22R2AMU      | 25 |
| RE22R2CMR      | 24 |
| RE22R2DMR      | 24 |
| RE22R2HMR      | 24 |
| RE22R2KMR      | 24 |
| RE22R2MJU      | 25 |
| RE22R2MMU      | 25 |
| RE22R2MMW      | 25 |
| RE22R2MWMR     | 24 |
| RE22R2MXMU     | 25 |
| RE22R2MYMR     | 24 |
| RE22R2QEMR     | 24 |
| RE22R2QEMT     | 24 |
| RE22R2QGMR     | 24 |
| RE22R2QTMR     | 24 |
| RE48ACV12MW    | 27 |
| RE48AIPCOV     | 27 |
| RE48AMH13MW    | 27 |
| RE48AML12MW    | 27 |
| RE48ASETCOV    | 27 |
| RE48ASOC8SOLD  | 27 |
| RE48ASOC11AR   | 27 |
| RE48ASOC11SOLD | 27 |
| RE48ATM12MW    | 27 |
| RENF22R2MMW    | 23 |
| REXL2TMB7      | 26 |
| REXL2TMBD      | 26 |
| REXL2TMF7      | 26 |
| REXL2TMJD      | 26 |
| REXL2TMP7      | 26 |
| REXL4TMB7      | 26 |
| REXL4TMBD      | 26 |
| REXL4TMF7      | 26 |
| REXL4TMJD      | 26 |
| REXL4TMP7      | 26 |
| RUZC2M         | 27 |
| RUZC3M         | 27 |
| RXZE2M114      | 26 |
| RXZE2M114M     | 26 |
| RXZE2S108M     | 26 |
| RXZE2S114M     | 26 |
| RXZE2S114S     | 26 |





[www.schneider-electric.com/relays](http://www.schneider-electric.com/relays)

#### **Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric